


## CS3752C Conductivity Electrode

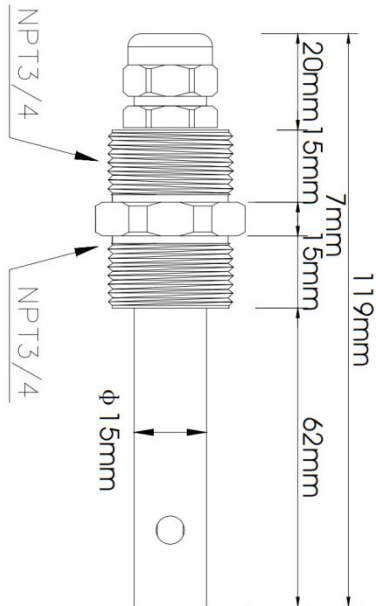

### Specification Parameters:

Conductivity range: 0.01~200  $\mu$  S/cm

Electrode mode: 2-pole type

Electrode constant:  $K \approx 0.1$

Liquid connection material: 316L

Temperature: 0~80° C

Pressure resistance: 0~2.0Mpa

Temperature sensor:

NTC10K/NTC2.2K/PT100/PT1000

Mounting interface: upper NPT3/4,

lower NPT3/4

Wire: 10m as standard

### Customisable items

Name	Content	Number
Temperature Sensor	NTC10K	N1
	NTC2.2K	N2
	PT100	P1
	PT1000	P2
Cable length	5m	m5
	10m	m10
	15m	m15
	20m	m20
Cable Connector	Boring Tin	A1
	Y Pins	A2
	Single Pin	A3