



Suspended Solids Series

Online Suspended Solids Meter T4075

Function

The principle of the sludge concentration sensor is based on the combined infrared absorption and scattered light method. The ISO7027 method can be used to continuously and accurately determine the sludge concentration. According to ISO7027 infrared double-scattering light technology is not affected by chromaticity to determine the sludge concentration value. The self-cleaning function can be selected according to the use environment. Stable data, reliable performance; built-in self-diagnosis function to ensure accurate data; simple installation and calibration.

Typical Use

The online suspended solids meter is an online analytical instrument designed to measure the sludge concentration of water from waterworks, municipal pipeline network, industrial process water quality monitoring, circulating cooling water, activated carbon filter effluent, membrane filtration effluent, etc. especially in the treatment of municipal sewage or industrial wastewater. Whether evaluating activated sludge and the entire biological treatment process, analyzing wastewater discharged after purification treatment, or detecting sludge concentration at different stages, the sludge concentration meter can give continuous and accurate measurement results.



Mains Supply

85 ~ 265VAC \pm 10%, 50 \pm 1Hz, power consumption \leq 3W

9 ~ 36VDC, Power consumption: \leq 3W

Measuring Range


Suspended Solids(sludge concentration): 0~99999mg/L

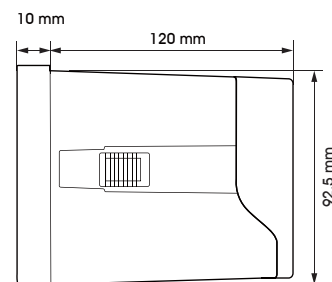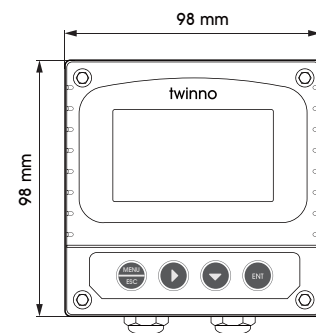


Online Suspended Solids Meter T4075

Features


1. Large display, standard 485 communication, with online and offline alarm, 98*98 *130mm meter size, 92.5*92.5mm hole size, 3.0 inch large screen display.
2. Real-time online recording of MLSS/SS, temperature data and curves, compatible with all water quality meters of our company.
3. 0-200mg/L, 0-5000mg/L, 0-100g/L, a variety of measuring ranges are available, suitable for different working conditions, the measurement accuracy is less than $\pm 5\%$ of the measured value.
4. The new choke inductance of the power board can effectively reduce the influence of electromagnetic interference, and the data is more stable.
5. The design of the whole machine is waterproof and dustproof, and the back cover of the connection terminal is added to extend the service life in harsh environments.
6. Panel/wall/pipe installation, three options are available to meet various industrial site installation requirements.

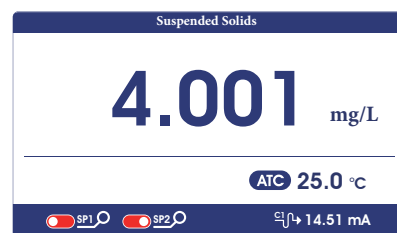

Measurement mode

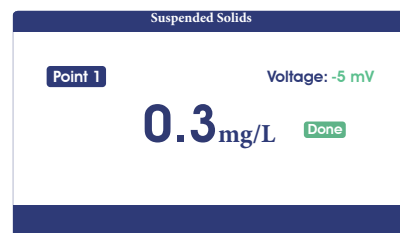

Calibration mode

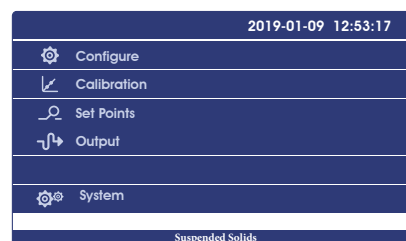


Setting mode

Electrical connections


Electrical connection The connection between the instrument and the sensor: the power supply, output signal, relay alarm contact and the connection between the sensor and the instrument are all inside the instrument. The length of the lead wire for the fixed electrode is usually 5-10 meters, and the corresponding label or color on the sensor Insert the wire into the corresponding terminal inside the instrument and tighten it.

Instrument installation method

Embedded installation


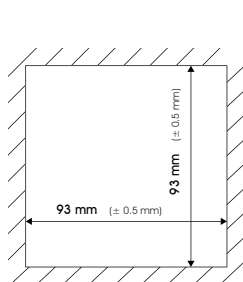


Insert mounting hole size

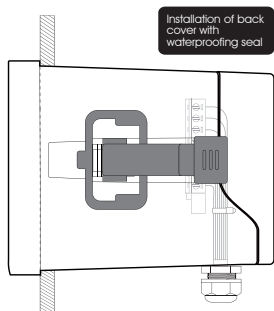


Insert the instrument into the square hole and fix it with the collocated clip.

Wall mounting

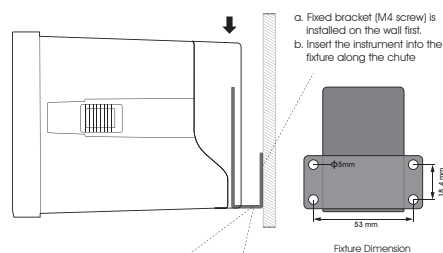

Fixed bracket (M4 screw) is installed on the wall first.



Insert the instrument into the fixture along the chute

Technical specifications

Measurement range	0~500~5000mg/L;0~100g/L(Can be extended)
Measurement unit	mg/L; g/L
Resolution	0.001mg/L;0.1g/L
Basic error	±1%F.S
Temperature	0~50°C
Temperature Resolution	0.1°C
Temperature Basic error	±0.3°C
Current outputs	Two 4~20mA,20~4mA,0~20mA
Signal output	RS485 MODBUS RTU
Other functions	Data record
Three relay control contacts	5A 250VAC,5A 30VDC
Optional power supply	85~265VAC,9~36VDC,power consumption≤3W
Working conditions	No strong magnetic field interference around except the geomagnetic field.
Working temperature	-10~60°C
Relative humidity	≤90%
Waterproof rating	IP65
Weight	0.6kg
Dimensions	98×98×130mm
Installation opening size	92.5×92.5mm
Installation methods	Panel & wall mounted or pipeline

Digital Suspended Solids (Sludge concentration) Sensor



Introduction:

The principle of the sludge concentration sensor is based on the combined infrared absorption and scattered light method. The ISO7027 method can be used to continuously and accurately determine the sludge concentration. According to ISO7027 infrared double-scattering light technology is not affected by chromaticity to determine the sludge concentration value. The self-cleaning function can be selected according to the use environment. Stable data, reliable performance; built-in self-diagnosis function to ensure accurate data; simple installation and calibration.

The electrode body is made of 316L stainless steel, which is corrosion-resistant and more durable. The seawater version can be plated with titanium, which also performs well under strong corrosion. IP68 waterproof design, can be used for input measurement.

0-200mg/L, 0-5000mg/L, 0-50000mg/L, a variety of measuring ranges are available, suitable for different working conditions, the measurement accuracy is less than $\pm 5\%$ of the measured value.

The sludge concentration meter is an online analytical instrument designed to measure the concentration of suspended solids in the treatment of municipal sewage or industrial wastewater. Whether evaluating activated sludge and the entire biological treatment process, analyzing wastewater discharged after purification treatment, or detecting sludge concentration at different stages, the sludge concentration meter can give continuous and accurate measurement results.

Typical application:

Suspended Solids (Sludge concentration) monitoring of water from waterworks, water quality monitoring of municipal pipeline network; industrial process water quality monitoring, circulating cooling water, activated carbon filter effluent, membrane filtration effluent, etc.

Technical parameters:

Model No.	CS7850D/CS7851D/CS7860D
Power/Outlet	9~36VDC/RS485 MODBUS RTU
Measurement mode	90° IR scattered light method
Dimensions	Diameter 50mm*Length 223mm
Housing material	POM+316 Stainless steel
Waterproof rating	IP68
Measurement range	2-200 mg/L/5000mg/L/50000mg/L
Measurement accuracy	± 5% or 0.5mg/L, whichever is greater
Pressure resistance	≤0.3Mpa
Measuring temperature	0-45℃
Calibration	Standard liquid calibration, water sample calibration
Cable length	10m or customize
Thread	G3/4
Weight	1.5kg
Application	General applications, rivers, lakes, environmental protection, etc.